

IP origen	IP destino	TTL	
11.0.0.10	12.0.0.50	64	
CABECERA IP			DATOS IP

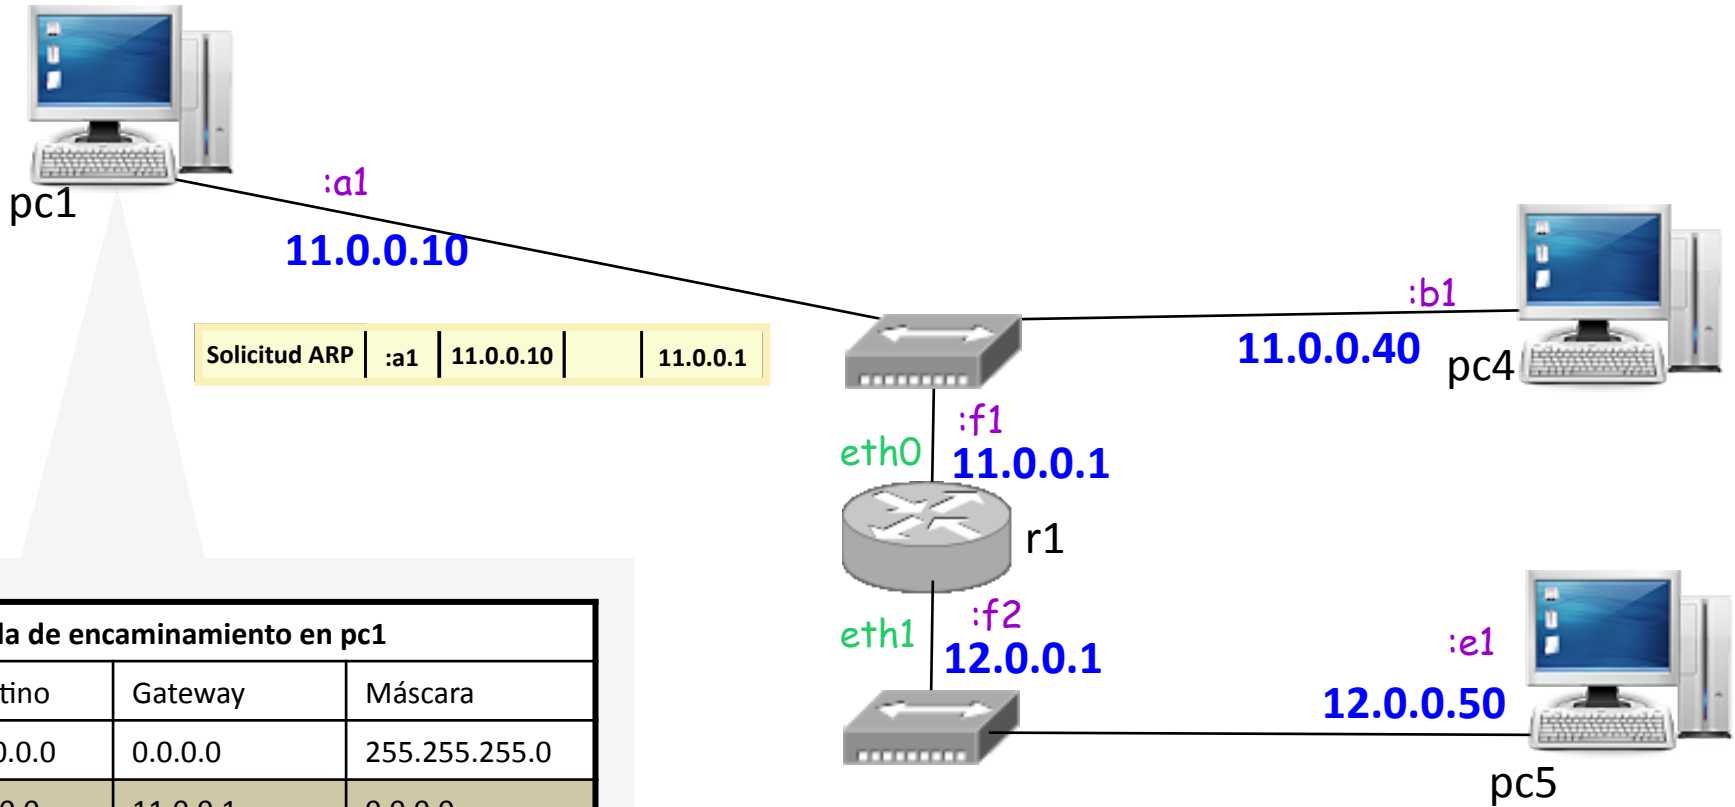


Tabla de encaminamiento en pc1

Destino	Gateway	Máscara
11.0.0.0	0.0.0.0	255.255.255.0
0.0.0.0	11.0.0.1	0.0.0.0

Caché ARP en pc1

IP	Ethernet	Interfaz
11.0.0.40	:b1	eth0